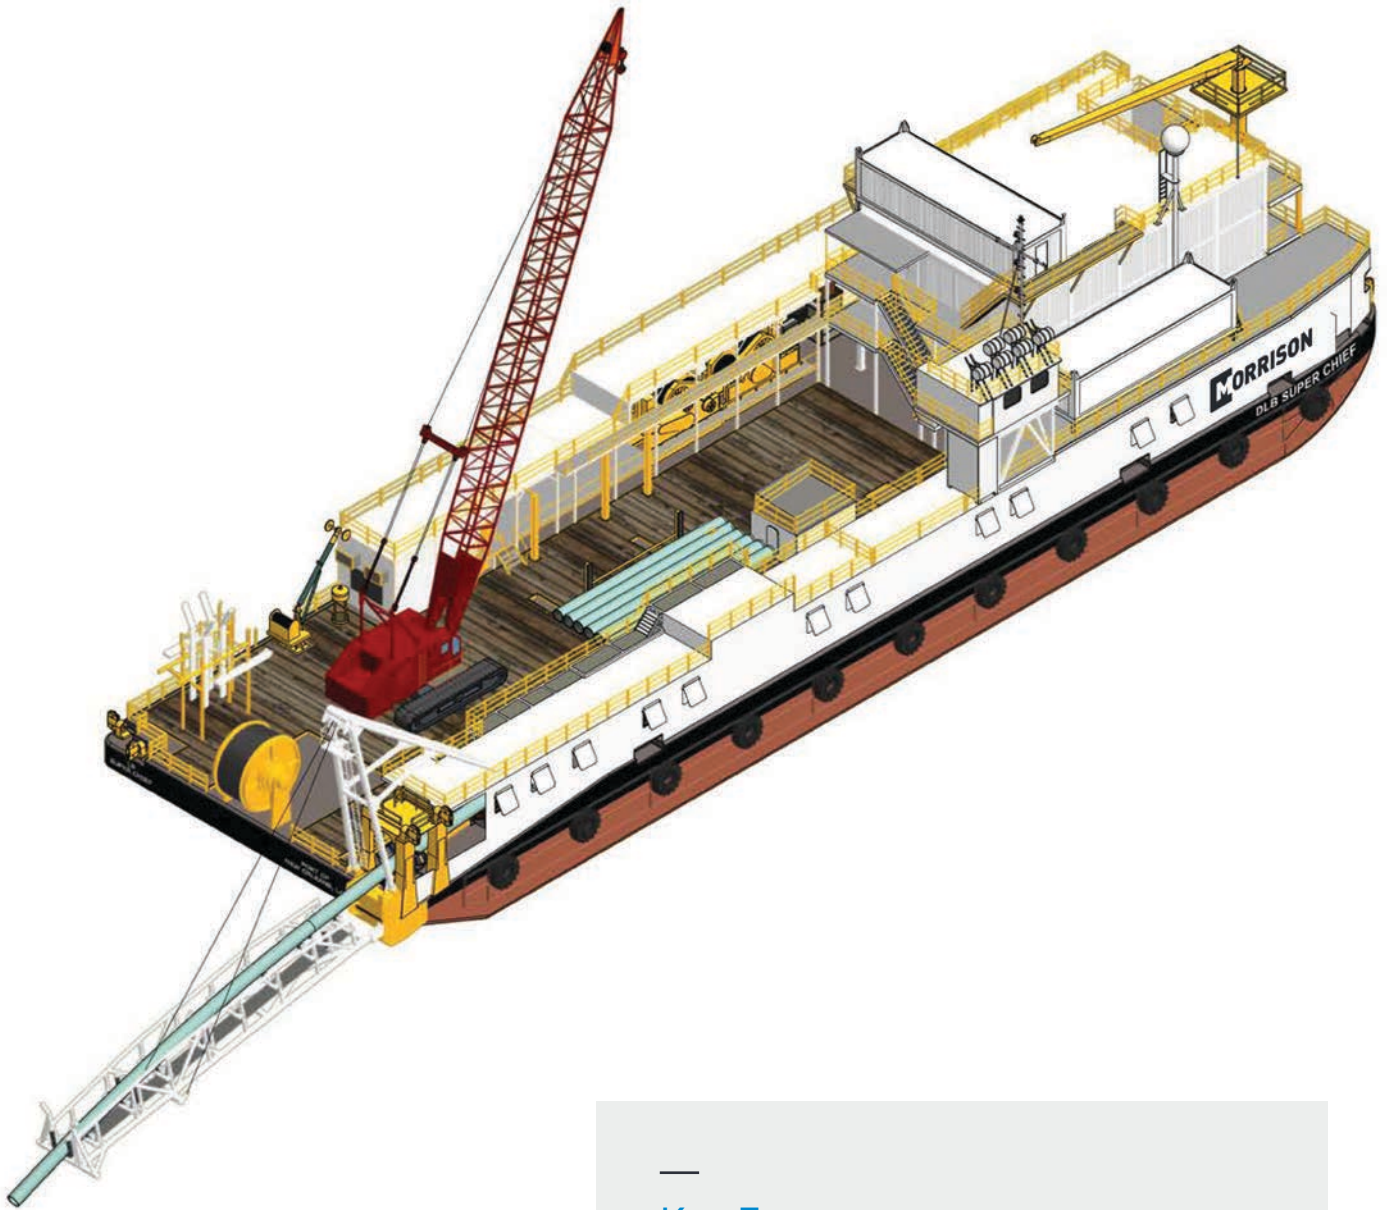

DLB SUPER CHIEF



Key Features

- Climate controlled surface dive chambers on vessel
- Large crane capacity
- Stable vessel due to molded bow design
- Capable of handling pipe up to 40 in diameter
- Project specific stinger design available

Dimensions

Length (with apron)	265 ft
Width	72 ft
Depth	16 ft
Accommodations	79 to 91 personnel

Classification

US Flag
USCG COI
ABS Classed #9938791

Capacities

Fuel	138,150 gal
Water	153,500 gal
Ballast	300,020 gal

Generators

1000 kw
800 kw
150 kw - emergency generator

Air compressors

375 cfm, deck unit

Welding machines

(8) Miller 400 amp DC

Cranes

Manitowoc 4100W S2, boom length 110 ft
Nautilus 40 - 2 - 70 (bow) Main 7 st / 6 mt @60 ft
Aux 2.9 st / 2 mt @70 ft

Mooring

Winches:

Skagit 97 series 3-drum (bow)
4,000 ft x 1.5 / 1,200 m x 38mm per drum
(2) Skagit 97 series 2-drum (stern)
4,000 ft x 1.5 / 1,200 m x 38mm per drum

Stall rating 112.5 st / 102 mt
Brake holding power 100 st / 90 mt
Line speed

Max - 248 FPM / 75.6 mpm full drum
Min - 30 FPM / 9.14 mpm bare drum

Anchors:

(7) 7.5 st / 6.8 mt delta flipper standard
Up to 14 st / 13 mt bruce twin shank available

Pipelay equipment

Firing line Covered and weatherized
(5) Work stations: (3) Welding, (1) X-Ray, (1) Field joint stall

Pipe tensioner 100 kips (PDI track type)
PDI pipe handling equipment 3 in to 40 in including coating
A&R winch 100 kips (Intercon) hydraulic

Stinger length 75 ft (standard)
(Project specific stinger design available)

Pipe burial equipment

Burial sleds Conventional pull style (standard)
Deck jet pumps 10 in x 10 in

Common pipe size storage amounts

14 in - 353 joints (14,106 ft)
12 in - 480 joints (19,200 ft)
10 in - 691 joints (27,648 ft)
8 in - 1,080 joints (43,200 ft)
6 in - 1,920 joints (76,800 ft)
4 in - 4,320 joints (172,800 ft)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

HOUSTON, TEXAS

16285 Park Ten Place, Suite 100
Houston, TX 77084
713.344.9233

CORPORATE MAILING ADDRESS

PO Box 3301
Houma, LA 70361

US | Mexico | West Indies

MorrisonEnergy.com